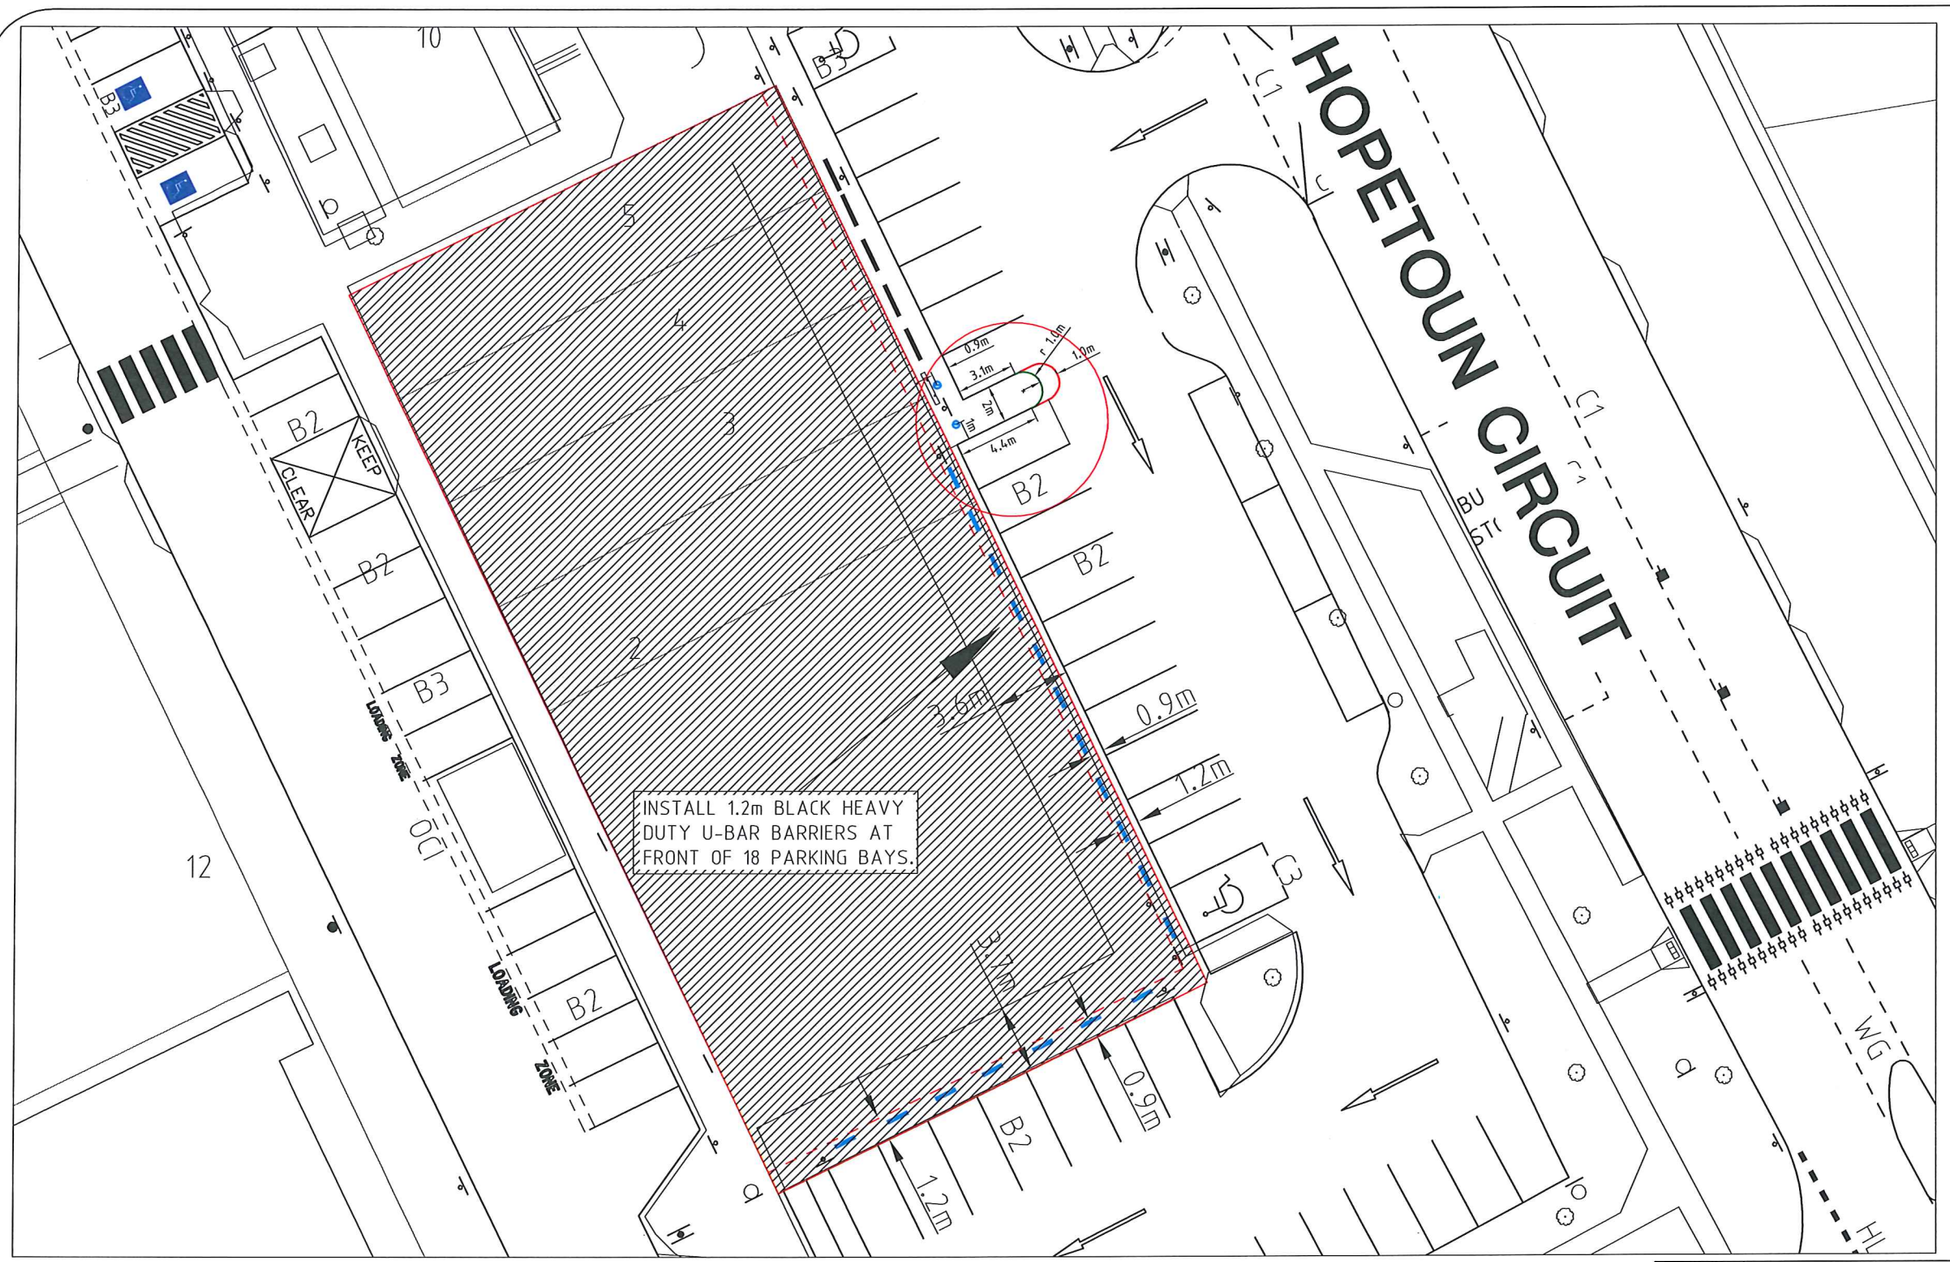

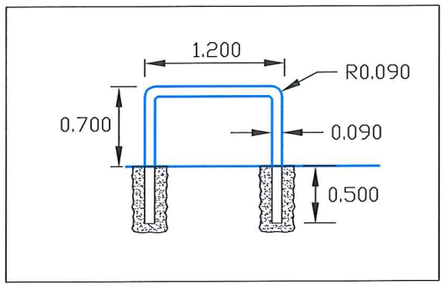

DETAIL BARRIER

SURVEY BOUNDARY

EASEMENT

NOTE

ALL PAVEMENT MARKINGS AND SIGN POSTING TO BE IN ACCORDANCE WITH AUSTRALIAN STANDARD AS1742 EXCEPT WHERE MODIFIED BY TERRITORY AND MUNICIPAL SERVICES DESIGN STANDARD FOR URBAN INFRASTRUCTURE DS09-TRAFFIC CONTROL DEVICES. FOR A COPY PLEASE VISIT http://www.tams.act.gov.au/__data/assets/pdf_file/0003/34698/Ref-11_TAMS_Drafting_Standard.pdfALL SIGNAGE INSTALLED ON ELP's TO BE POSITIONED TO AVOID COVERING THE ELP ASSET NUMBER.
ALL LINEMARKING TO BE WATERBORNE PAINT UNLESS NOTED OTHERWISE. LLM DENOTES LONG LIFE MATERIAL SUCH AS THERMOPLASTIC; COLD APPLIED PLASTIC CEMENT BASED PRODUCTS CAPABLE OF HAVING QUARTZ APPLIED.
ALL REDUNDANT AND/OR CONFLICTING LINEMARKING TO BE ERADICATED.

N

LEGEND

- ERADICATE LINEMARKING, SIGNS AND REMOVE KERB/CONCRETE.
- EXISTING LINEMARKING, SIGNS KERB AND CONCRETE.
- APPLY NEW LINEMARKING
- INSTALL NEW KERB, CONCRETE
- ERECT R5-35 — ERECT NEW SIGN

NO	AMENDMENTS	APPROVED	DATE

SIGN SCHEDULE

DESCRIPTION	HAND	SIZE	NO. OF.
SIGNS TO BE ERECTED			
SIGNS TO BE REMOVED			

GRID NUMBER	G297
MNW NUMBER	795583
DOCUMENT STATUS	APPROVED
PROJECT OFFICER	RH
PHONE NO	
SIGNATURE	
DRAFTED	VS
ACTION DATE	27-08-2013
DATE PLOTTED	27-08-2013
SCALE	NTS
DOCUMENT NUMBER	TC13-514
SHEET No	1/2
REVISION	1

ACT GOVERNMENT

Authorised pursuant to Part 5 of Road Transport (Safety and Traffic Management) ACT 1999

Authorising Signature

Territory and Municipal Services — ACT GOVERNMENT

DEAKIN

Hopetoun Cct

Traffic Control Devices